

59U(58U)型机械密封

技术参数

非平衡型 Unbalanced

单端面密封 Single seal

任意旋向 Independent on Direction of Rotation

介质温度

介质压力

线速度

Temperature of Medium: -20°C-200°C

Pressure of Medium: 0-1MPa


Line Speed: ≤20m/sec



58U型
O橡胶O形环
OF4包橡胶O形环



59U型
聚四氟乙烯模形环

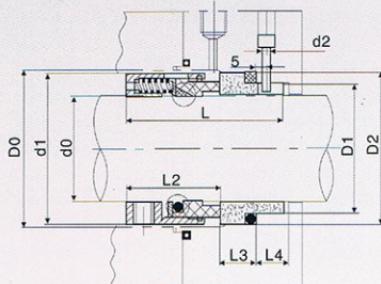

偏尺寸 差	d0	D1	D2	D0	d1	L1	L2	L3	L4	d2
规格	h6	H11	H8							
59U-20	20	29	35	36	34	45	24	13.5	9	
59U-22	22	31	37	38	36	45	24	13.5	9	
59U-24	24	33	39	40	38	47	26.7	13.3	9	
59U-25	25	34	40	41	39	47	27	13	9	
59U-28	28	37	43	44	42	50	30	12.5	9	
59U-30	30	39	45	46	44	50	30.5	12	9	
59U-32	32	42	48	48	46	50	30.5	12	9	
59U-33	33	42	48	49	47	50	30.5	12	9	
59U-35	35	44	50	51	49	50	30.5	12	9	
59U-38	38	49	56	58	54	52	32	13	9	
59U-40	40	51	58	60	56	52	32	13	9	
59U-43	43	54	61	63	59	52	32	13	9	
59U-45	45	56	63	65	61	52	32	13	9	
59U-48	48	59	66	68	64	52	32	13	9	
59U-50	50	62	70	70	66	55	34	13.5	9	
59U-53	53	65	73	73	69	55	34	13.5	9	
59U-55	55	67	75	75	71	55	34	13.5	9	
59U-58	58	70	78	83	78	60	39	13.5	9	
59U-60	60	72	80	85	80	60	39	13.5	9	
59U-63	63	75	83	88	83	60	39	13.5	9	
59U-65	65	77	85	90	85	60	39	13.5	9	
59U-68	68	81	90	93	88	60	39	13.5	9	
59U-70	70	83	92	95	90	67	45.5	14.5	9	
59U-75	75	88	97	104	95	67	45.5	14.5	9	
59U-80	80	95	105	109	104	67	45	15	9	
59U-85	85	100	110	114	109	67	45	15	9	
59U-90	90	105	115	119	114	72	50	15	9	
59U-95	95	110	120	124	119	72	50	15	9	
59U-100	100	115	125	129	124	72	50	15	9	

3

4