



1527 型机械密封

技术参数

非平衡型 Unbalanced
 单端面密封 Single seal
 旋转方向固定 Dependent on direction of rotation

介质温度
 介质压力
 线速度

Temperature of medium: -20°C-150°C
 Pressure of medium: 0-1MPa
 Line speed: $\leq 15\text{m/sec}$

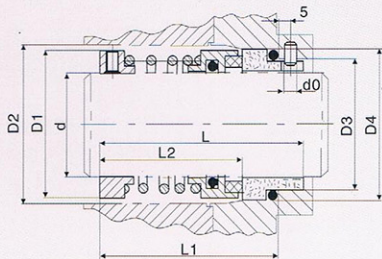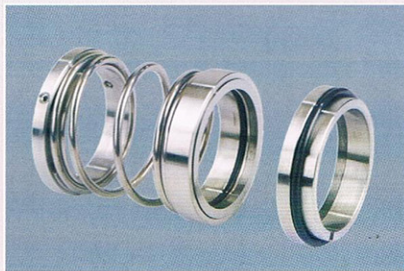

规格	尺寸	d	D1	D2	D3	D4	L	L1	L2	d0
1527-18		h6			H11	H8				
1527-18		18	32	34	27	33	52	45	35	
1527-20		20	34	36	29	35	52	45	35	
1527-22		22	36	38	31	37	52	45	35	
1527-24		24	38	40	33	39	57	50	40	
1527-25		25	39	41	34	40	57	50	40	
1527-28		28	42	44	37	43	57	50	40	3
1527-30		30	44	46	39	45	57	50	40	
1527-32		32	46	48	42	48	62	55	45	
1527-33		33	47	49	42	48	62	55	45	
1527-35		35	49	51	44	50	62	55	45	
1527-38		38	54	58	49	56	62	55	44	
1527-40		40	56	60	51	58	62	55	44	
1527-43		43	59	63	54	61	67	60	49	
1527-45		45	61	65	56	63	67	60	49	
1527-48		48	64	68	59	66	67	60	49	
1527-50		50	66	70	62	70	67	60	47	
1527-53		53	69	73	65	73	77	70	57	
1527-55		55	71	75	67	75	77	70	57	
1527-58		58	78	83	70	78	77	70	57	
1527-60		60	80	85	72	80	77	70	57	
1527-63		63	83	88	75	83	77	70	57	
1527-65		65	85	90	77	85	87	80	67	
1527-68		68	88	93	81	90	87	80	64.7	
1527-70		70	90	95	83	92	87	80	64.7	
1527-75		75	99	104	88	97	87	80	64.7	
1527-80		80	104	109	95	105	97	90	74.3	
1527-85		85	109	114	100	110	97	90	74.3	
1527-90		90	114	119	105	115	97	90	74.3	
1527-95		95	119	124	110	120	97	90	74.3	
1527-100		100	124	129	115	125	97	90	74.3	4